



## OWNERS MANUAL



# SINGLE ZONE LI RECHARGEABLE FRIDGE/FREEZERS

10001044/10001045

[www.oztrail.com.au](http://www.oztrail.com.au)



# CONTENTS

General Information & Safety Instructions.....	3
Products Overview .....	4
Getting Started.....	5
Operating your Fridge/Freezer .....	6
Temp Control/General Operation .....	8
Single Zone Operation.....	9
Using with Solar Panel or Generator.....	10
Operating Bluetooth .....	11
Tips, Maintenance & Service.....	13
Troubleshooting.....	14
Error Code Information.....	15
Specifications .....	15
Warranty Details .....	16

# GENERAL INFO & SAFETY INSTRUCTIONS

**Read this manual thoroughly before first use**, even if you are familiar with this type of product. The safety precautions detailed in this manual reduce the risk of fire, electric shock and injury when correctly adhered to. Keep the manual in a safe place for future reference, along with purchase receipt and carton. If applicable, pass these instructions on to the next owner of the appliance.

**NOTE: Intended use:** This is a portable product, designed for private use. It is exclusively designed for use in cars, caravans and other vehicles including mobile homes, campervans, rail cars and boats. It is designed to cool food and beverages and to be set up in dry, weather protected areas. It is not intended for stationary extended use e.g. a second fridge at home.

Always follow basic safety precautions and accident prevention measures when using an electrical appliance, including the following:

## ELECTRICAL SAFETY & CORD HANDLING

- **Correct voltage:** Make sure your local outlet voltage and circuit frequency corresponds to the voltage indicated on the appliance rating label.
- **Safe connection:** Insert the plug firmly into a properly earthed AC mains or 12V DC socket. Do not alter the plug.
- **Protect from moisture:** To protect against electric shock, do not immerse the cable, plug or the appliance itself in water or other liquid. Ensure your hands are dry before handling the plug or switching on the appliance. Do not use it on wet surfaces.
- **Protect the power cable.** Do not kink or damage the power cable. Do not wrap it around the appliance. Do not pull the unit by the cable. Do not use the cable as a handle, close a door on the cable or pull the cable around sharp edges or corners. Keep the cable away from heated surfaces.

- **Never touch uninsulated cables with bare hands.** This applies especially to handling AC cables.
- **For installation in boats:** If the device is AC mains operated, it is important that the system is protected by a fuse and an earth leakage protection device.

**NOTE:** Installation of AC in boats should be carried out by a qualified electrician.

- **Always ensure that the correct voltage** is applied to the fridge/freezer. The voltage is stated on the fridge/freezer's data plate.
- **Never obstruct vents** to the fridge/freezer's compressor.
- **Defrost the fridge/freezer** on a regular basis.
- **Never use hard or sharp implements** to remove ice from the cooling compartment.
- **Never use abrasive or solvent based materials** when cleaning the cooling compartment.
- **Do not use any electrical appliances** inside the cooling compartment.

**NOTE:** This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.

- **Do not** expose to rain.
- This appliance is suitable for camping use.

# PRODUCT OVERVIEW

## SINGLE ZONE FRIDGE/FREEZER

1. Internal Basket
2. Control Panel
3. Single Lid
4. Lid Latches
5. Carry Handle
6. Air Flow Vent
7. Power Input Panel
8. AC Power Cable (Page 7.)
9. DC Power Cable (Page 7.)
10. Battery Compartment Access



## LITHIUM BATTERY PACK

11. On/Off Switch Button



# GETTING STARTED

## INSTALLATION

After unpacking the fridge/freezer check that no parts are missing. Place the unit in a dry place which is protected against splashing water. Do not place directly adjacent to sources of heat such as heating, gas ovens, hot water, pipes or under the blazing sun.

It is strongly recommended that you CHARGE your new fridge battery overnight as soon as possible. It is important that your appliance is installed and operated in accordance with these instructions to guarantee its performance, efficiency and operation.

## APPLICATION & OPERATIVE COOLING RANGE

The cooling compartment has varying temperature zones. The values indicated on the digital display are related to the middle of the cabinet.

The single zone fridge/freezer is designed to either refrigerate or freeze food. The fridge/freezer may be used for outdoor use such as for camping purposes.

If you wish to refrigerate medicines, first check to ensure the fridge/freezer's cooling capacity meets the demands of the respective medicines.

The fridge/freezer is designed to operate in ambient temperatures between  $-10^{\circ}$  and  $+55^{\circ}$  C in a maximum air humidity of 90% and can operate continuously at an angle of  $30^{\circ}$  maximum.

**Note:** The normal operation of the appliance requires heat to be radiated away from the condenser located at the end of the cabinet. Adequate airflow is required around the compressor at all times. (Fig. 1).


The cooling system has been designed to operate correctly when the appliance is positioned on angles up to 30 degrees. It is recommended that the time the unit is exposed to angles over 30 degrees is limited to a maximum of four (4) hours continuous operation. (Fig. 2).



Fig. 1



Fig. 2

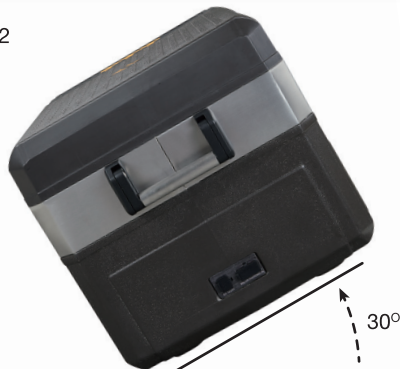

# OPERATING YOUR FRIDGE/FREEZER

## POWER REQUIREMENTS

- The fridge/freezer is designed to operate on DC voltage or the included lithium-ion battery pack (up to 32 hours (37L) or 26 hours (55L) run time)
- There are 3 ways of charging the battery:
  1. AC/DC 240V adaptor: this can power the fridge and charge the battery.
  2. DC charger: this can power the fridge and charge the battery, DC input: 12V or 24V DC (e.g. car cigarette lighter)
  3. Solar input: this will only charge the battery it cannot run the fridge without the battery installed.
- If the fridge/freezer is operating when the vehicle ignition is switched OFF, the fridge/freezer will automatically switch over to be powered by the integrated lithium-ion battery (for up to 32 hours (37L) or 26 hours (55L)).

## OPERATING WITH 12/24V DC

- Plug the 12V/24V DC power cable into the DC POWER socket (Fig 3.) on the end of the fridge/freezer and then connect to the vehicle cigarette lighter socket or suitable 12V or 24V DC power source.
- The fridge/freezer will need to be turned on at the control panel.
- The display will automatically show the current internal cabinet temperature, battery monitor setting, compressor speed setting, operating voltage and integrated battery charge level.
- For optimum performance and efficiency, it is important that the fridge/freezer has a **reliable DC power source available**. Direct connection to the battery is recommended and reduces the risk of voltage to the appliance dropping.
- Use only the DC power cable supplied with the fridge/freezer.

**Important:** If a DC extension cable is required we recommend use of a 6mm diameter (AWG11) 4.58mm<sup>2</sup> Twin Sheath Two Core cable with direct connection to the positive and negative battery terminals with 15A inline fuse protection.

## 12/24V DC POWER REQUIREMENTS

If your fridge/freezer is cutting out prematurely, it could be due to:

1. The battery voltage protection being set too high on the battery monitor (refer to page 9/10).
2. DC power cable and/or connections are not suitable to carry the required current. Check the power cable and all connections and adjust the battery monitor on the control panel if required.
3. Included lithium-ion battery pack voltage being below set voltage monitor setting.

The fridge/freezer is equipped with a multilevel battery monitor that protects your vehicle battery and the fridge/freezer lithium-ion battery, against excessive discharging when the fridge/freezer is connected to 12V or 24V DC power source.

**Important:** When using the fridge/freezer with DC power supply, or when running fridge off the battery pack, we recommend setting the battery monitor to **LOW** if fridge/freezer not running off crank battery.

- Your fridge/freezer is equipped with reverse polarity protection. It protects your fridge/freezer against reverse battery connection and short circuit.



Fig. 3

# OPERATING YOUR FRIDGE/FREEZER

- As a protection for your battery, the fridge/freezer switches OFF automatically if the power source voltage is insufficient. Fridge will only restart when voltage reaches cut in level in either the DC power source or the battery pack.

**Note:** It is important that the correct cable size and gauge is used for the installation of the DC supply as over distance the voltage can decrease if the incorrect cable size and gauge is being used.

- Always consult a qualified automotive electrician when using a DC extension cable.

**Note:** You should always try to keep the battery voltage above 11.5V in the integrated power pack to ensure maximum life span.

## OPERATING WITH 240V AC

- The fridge/freezer comes with the battery turned off out of the box. Please sure you turn the battery on then turn on the fridge at the control panel.
- Please ensure fridge is charged straight away.
- Plug the 240V AC power adaptor and cable into the fridge DC 12V/24V power socket (Fig. 3) on the end of the fridge/freezer and then connect to a suitable 240V AC power source.
- The fridge/freezer will need to be turned on at the control panel.
- The display will automatically show the current internal cabinet temperature, built in battery voltage and level, battery monitor setting and compressor speed setting.

**CAUTION:** Do not touch cables, plugs or switches with wet hands or when any of your body is in contact with water! If you operate your fridge/freezer onboard a boat by means of a shore connection to a 220-240V AC power source, the power connection must include an earth leakage RCD residual current device.



AC/DC Power Adaptor



DC Power Cable

(Can be Cigarette connection or Anderson plug connection by separating the two anderson plugs)







# TEMP CONTROL/GENERAL OPERATION

When your fridge/freezer is first connected to the DC power input the appliance will automatically show a charging symbol on the LED screen. Turn on the fridge/freezer by pressing the “On/Off” button. It will display the current cabinet temperature, battery monitor, compressor setting as well as the current input voltage and internal battery state of charge.

- The temperature controller provides the ability to set the desired temperature level and display the current cabinet temperature. The electronic controller has been programmed to maintain an average of the set temperature.
- The compressor will start up when the internal cabinet temperature increases 0.5 to 1.5 degrees above the set temperature and will run until the temperature is 0.5 to 1.5 degrees below the set temperature.

## BATTERY DISPLAY

Voltage is measured at the input connection on the side of the appliance.

Battery Display	12V
	9.6V or less
	9.6V to 10.4V
	10.5V to 11.0V
	11.1V to 11.5V
	11.6V to 11.9V
	12V or above


**\*Values are for reference only and may be subject to change depending on conditions and power supply.**

**NOTE: Charge the internal lithium-ion battery pack on a monthly basis, especially if the fridge is going to be in storage for a length of time. This will ensure maximum battery cycle life.**



# SINGLE ZONE OPERATION

1. Power On/Off Button
2. Setting Button
3. Temp Decrease Button
4. Temp Increase Button
5. Temp Display
6. Battery Monitor Display
7. Compressor Speed Display
8. Integrated Li Battery Level
9. Input Voltage Display
10. USB C and USB Outlets
11. Auto Lock Symbol
12. Bluetooth Icon

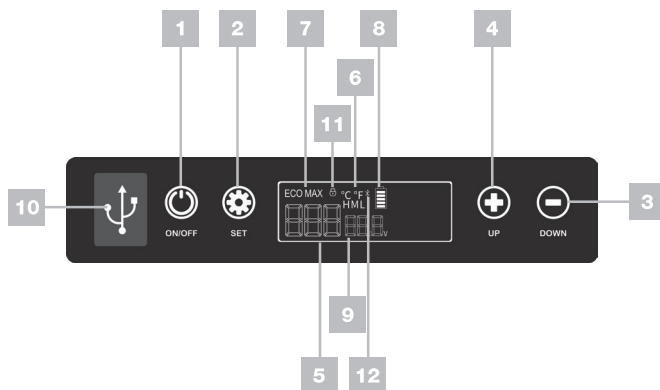

## AUTO LOCKING DISPLAY

1. This control panel has an auto lock after 30 seconds this prevents the settings being accidentally changed. The screen will also dim after 30 seconds.
2. To unlock the display hold the setting button for 3 seconds.

## POWER OFF AND ON

1. Press power button for 2 seconds and fridge will go into standby mode then switch off after 5 seconds.
2. Press the power button and fridge will restart with previously selected settings.

## CABINET TEMPERATURE SETTING

1. Adjust temperature by pressing the + button to increase temp and the - button to decrease temp.

**Note:** Maximum temperature settings are from +24°C to -22°C.

2. Temperature display will flash when selecting temperature and return to solid display when showing actual internal temperature.

## SETTINGS

1. Press the “Setting” button once. Then press again to cycle through the compressor speed, battery monitor and temperature setting °C.
2. Each setting will flash when selected. Use the “+ /-” buttons to adjust the setting.
3. Compressor Speed: Max / Eco
4. Temperature Setting: °C / F
5. Battery Monitor: Low / Medium / High

## BATTERY MONITOR – SETTING

12V DC Input	Cut Out	Cut In
HIGH	11.1V	12.4V
MEDIUM	10.4V	11.7V
LOW	9.6V	11.2V

24V DC Input	Cut Out	Cut In
HIGH	24.3V	25.7V
MEDIUM	22.8V	24.2V
LOW	21.4V	23.0V

# USING WITH SOLAR PANEL OR GENERATOR

## USING WITH SOLAR PANELS

- The power consumption and efficiency of your fridge/freezer makes it ideal to be used in conjunction with solar panels to provide recharging of the DC power source. Solar panels will provide charge into the battery during the daylight hours even while the appliance is operating.
- As the output from solar panels changes depending on the level of sunlight and intensity, your fridge/freezer charging efficiency will vary depending on conditions and solar panel output.
- We recommend the use of the quality regulated portable solar panel kits from 60 to 250 watts for use with your fridge/freezer.

### IMPORTANT NOTE:

**The solar controller being used must be adjusted to only output a maximum of 12.6V to suit the integrated lithium-ion battery pack specifications if charging it directly via the Anderson plug/s.**

**The fridge will charge and operate when connected to AC (via adaptor supplied) or DC connections. The fridge will also operate with the integrated battery pack removed when connected to a suitable AC or DC power source so the battery pack can be used separately from the fridge.**

## USING PORTABLE GENERATORS

- It is important that the correct generator size is used with your fridge/freezer. An incorrect generator or voltage output may result in reduced performance or damage to your fridge/freezer which may void your appliance warranty.
- If connecting directly to an AC generator, ensure that **only a digital or inverter type generator** is used. These provide a more reliable and constant 240V AC output power source and are specifically designed for use with electronic and other power sensitive appliances.

**For use with generator you must only use the supplied AC adaptor.**

- Most generators are fitted with a DC power output socket - DO NOT connect your fridge directly to the DC power output of the generator as this will result in damage to your fridge/freezer and void warranty.

# OPERATING BLUETOOTH

To operate the OZtrail fridge/freezer via bluetooth you will first need to download the Smart Life – Smart Living APP via APPSTORE or GOOGLE PLAYSTORE or scan the QR code by the phone.



## STEP 1

- Download the Smart Life APP, then install it.

## STEP 2

- Connect the OZtrail fridge/freezer by the DC or AC power cord, and turn the fridge/freezer on.

## STEP 3


- Turn on Bluetooth on your phone.

## STEP 4

- Open the APP, accept the User Agreement/ Privacy Statement and follow the steps to sign up to the APP.

## STEP 5


- Once signed up, the below screen will appear. In 'Discovering devices', click 'Add' to add the fridge/freezer.

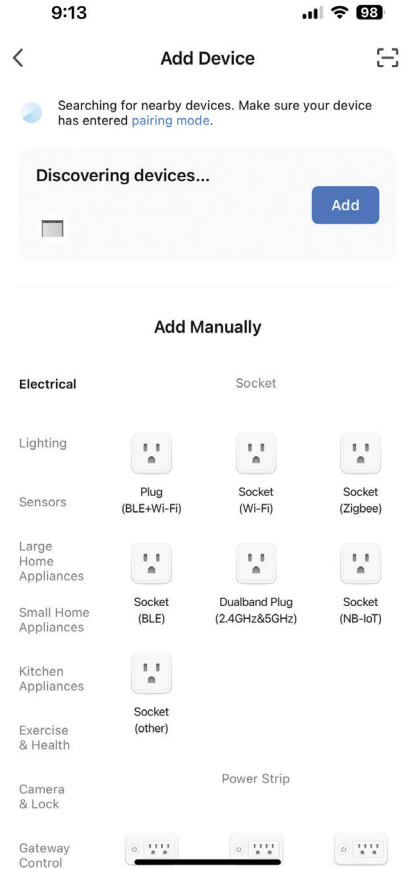

# OPERATING BLUETOOTH

## STEP 6

- The below screen will appear, click on the device. The device name is OZtrail Li Rechargeable fridge/freezer

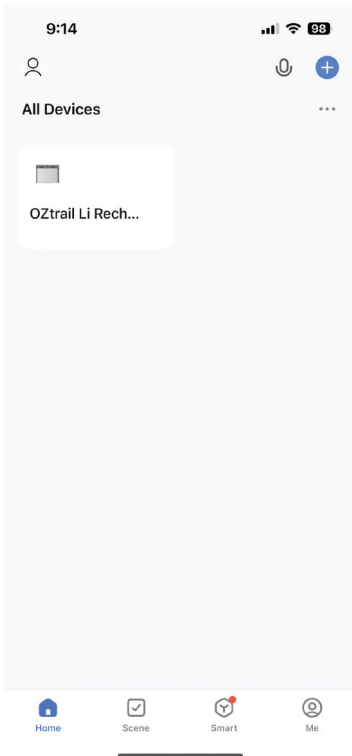


## STEP 7

Start using the Bluetooth APP with your OZtrail fridge/freezer. You will be able to access the following features via the APP -

- To adjust the settings, click the Lock icon to unlock. It will automatically lock again after 30 seconds of no activity.
- Check/change temperature setting or temperature unit setting
- Check/change battery monitor setting

- Check/change compressor speed setting
- Turn on/off the fridge/freezer
- Paired icon - you must be within Bluetooth range of the fridge/freezer to stay connected

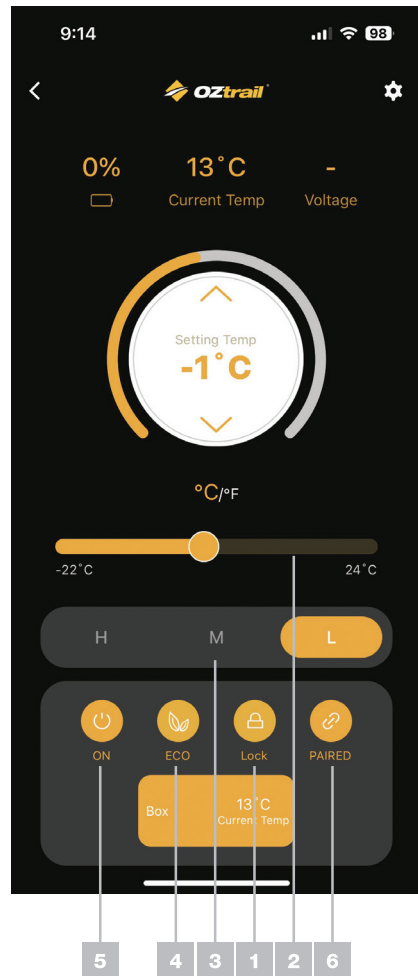

# TIPS, MAINTENANCE & SERVICE

## TIPS AND SUGGESTIONS

- Fresh and frozen foods should not be stored right beside each other in the cabinet. Doing so may cause fresh food to freeze and/or spoil.
- When the appliance is being set at 0° or lower temperatures, do not store glass bottles or liquids such as milk, juices or soft drinks in the unit as these may freeze and shatter, leak or burst.
- Items such as fruit and vegetables should be stored closer to the top of the cabinet as this area is normally slightly warmer. This will reduce the risk of spoiling and ensures that damage is not caused by being crushed by heavier items.
- To improve the efficiency of your fridge/freezer it is better to have the cabinet as full as possible at all times. A full cabinet will provide lower power consumption over 24 hours than a half empty one. When the cabinet is full there is little air space between the goods so the cold air is trapped, but when there is lots of air the coldness cannot be captured and held. On a trip it is a good idea to replace finished products with bottles of water or similar. This will fill the empty spaces and allow the coldness to remain within the cabinet.
- Frequent door opening will allow warm air to enter the cabinet. Keep the number of times you open the door to a minimum where possible.
- When located in the rear of a car or trailer, it is recommended that the appliance be kept away from direct sunlight to reduce the risk of increased heat. It should also be provided with suitable ventilation to guarantee efficient power consumption and performance. You must remember that when a vehicle is parked in the sun that on a day where the ambient temperature is +30°C, the interior of the vehicle can reach +55°C.

## MAINTENANCE & SERVICE

Your fridge/freezer will be delivered cleaned from the factory – you nevertheless should clean prior to initial use. Use a cloth which has been slightly moistened with lukewarm water. Pay attention that no water drops into the seals and possibly damages the electronics. Dry off the fridge/freezer with a cloth after cleaning. Clean your fridge/freezer periodically and as soon as it is dirty.

### ATTENTION:

- **DO NOT** use solvents or agents with sand or acid parts for cleaning your fridge/freezer.
- **DO NOT** use brushes, graters or hard sharp tools to clean your fridge/freezer.
- Before cleaning, the power cable should be disconnected and the fridge/freezer switched OFF.
- Clean the fridge/freezer inside and out with a damp cloth. For stubborn dirt, use some sodium bicarbonate dissolved in lukewarm water.
- After washing, rinse with clean water and dry carefully.
- When storing your fridge/freezer for a long period of time, **DO NOT** fully close the lid. This will prevent mould and odours.

**For additional queries, service and maintenance please contact our After Sales Support 1300 362 921. They will provide you with expert advice on further information you may require.**

### DISPOSAL

**When it comes to the end of its working life, your fridge/freezer should be disposed of responsibly to ensure that it does not contaminate the environment. Contact your local council for advice on the disposal of this unit.**

# TROUBLESHOOTING


Issue	Possible Solutions
The fridge/freezer will not turn on	Check the unit is switched ON – Press the power button to turn on
	Ensure battery is turned on
	Check the power source (voltage may be too low)
	Check the power cable and all connections from the power source to fridge/freezer
The contents of the fridge are freezing	The temperature has been set too low, therefore increase the temperature setting
Poor refrigeration performance	Too much food has been put inside the unit
	Temperature of the food put inside the fridge is too high
	Ensure lid is closed properly
	Ensure power source has sufficient voltage
	There is poor ventilation around the fridge
	Ambient temperature is very high
	Temperature is not set correctly
There is a “water flow” type of noise from inside the unit	This is normal, caused by the flow of refrigerant
There is a noise from the unit	Ensure unit is on a flat level surface
	Check for vibrations in surrounding objects
Fridge/freezer does not work and display does not illuminate	There is no voltage present in the 12V/24V cigarette lighter socket in your vehicle. The ignition must be switched ON in most vehicles to apply current to the cigarette lighter socket
	No voltage present in the AC voltage socket. Try using another plug socket
	The 240V AC adaptor is defective. This can be replaced by contacting after sales support on 1300 362 921
Fridge/freezer does not work and display does not illuminate when operating from the 12V/24V cigarette lighter socket with ignition switched ON.	The cigarette lighter socket fuse in vehicle is defective and must be replaced
	The cigarette lighter socket in vehicle must be cleaned or the plug has not been assembled correctly
The display shows an error message and the fridge/freezer does not cool	Connected to DC power source, the fridge/freezer has switched off. This may be due to low voltage. Check Battery Monitor setting is on LOW. Re-start vehicle to increase battery voltage level. Test and charge battery
	The fridge/freezer has switched off due to an internal fault. Contact After Sales Support 1300 362 921

# ERROR CODE INFORMATION

Error Code	Possible Cause	Solution
E1	Low voltage to fridge	DC - Increase voltage of DC power source/Check all connections/Check battery monitor setting
		AC - Replace defective 240V AC Power adaptor
E2	Condensor fan faulty	Contact After Sales Support 1300 362 921 to arrange repair
E3	Compressor over pressure	Disconnect power to fridge for 20 minutes and attempt re-start
E4	Compressor not kicking in	Contact After Sales Support 1300 362 921 to arrange repair
E5	Over temperature of the compressor & electronics	Disconnect power to fridge for 20 minutes and attempt re-start
E6	Temperature sensor faulty	Contact After Sales Support 1300 362 921 to arrange repair

# SPECIFICATIONS

Model	10001044	10001045
Capacity	37lt Single Zone	55lt Single Zone
Weight	22.6kg (including battery)	25.6kg (including battery)
Dimensions	712mm W x 444mm D x 451mm H	816mm W x 484mm D x 453mm H
Compressor	LG	LG
Current Draw	4.4A MAX (12VDC), 2.2A MAX (24VDC) - 0.8AH Average Consumption	5.0A MAX (12VDC), 2.5A MAX (24VDC) - 1.0AH Average Consumption
Cooling Range	+24°C to -22°C	+24°C to -22°C
Power Input	52W	60w
Insulation	PU Foam	PU Foam
Material	PP+HIPS+HDPE+ABS+SUS304+SGCC	PP+HIPS+HDPE+ABS+SUS304+SGCC
Lithium-ion Power Pack	ABS Casing, 30Ah Capacity 12.8V MAX SOC	ABS Casing, 30Ah Capacity 12.8V MAX SOC

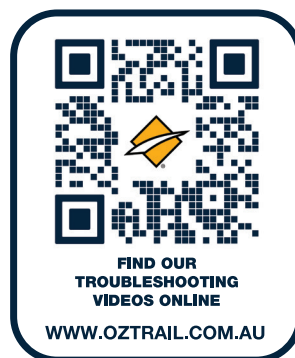

# WARRANTY

Adventure Trading Australia P/L warrants this product against defects for a period of three years from the date of purchase. Adventure Trading Australia P/L will repair or replace the product, at its discretion, should a warrantable defect arise within the warranty period. If the exact model is unavailable a model of equivalent nature will be substituted at our discretion. This warranty excludes faults and failures caused by improper use and abuse; fair wear and tear; or failure to follow instructions regarding care and maintenance. Products used for a commercial nature are not covered by this warranty against defects. A warranty may be claimed by returning the product to its place of purchase, with a detailed proof-of-purchase clearly showing the date and detail of the purchase or contacting Adventure Trading Australia P/L directly.

You can contact Adventure Trading Australia P/L Customer Service by phone on 1300 362 921, in writing: PO Box 1110, Eagle Farm QLD 4009. The benefits under Adventure Trading Australia P/L warranty against defects are in addition to other rights and remedies under law in relation to goods

Our goods come with guarantees that cannot be excluded under the Australian Consumer Law. You are entitled to a replacement or refund for a major failure and for compensation for any other reasonably foreseeable loss or damage. You are also entitled to have the goods repaired or replaced if the goods fail to be of acceptable quality and the failure does not amount to a major failure.

For more detailed information and an explanation of these terms see [www.oztrail.com.au/warranty](http://www.oztrail.com.au/warranty) or email [warranty@adventureoperations.com](mailto:warranty@adventureoperations.com)

WARRANTY - For details see [www.oztrail.com.au/warranty](http://www.oztrail.com.au/warranty)

OZtrail® is a registered trademark of  
**Adventure Trading Australia Pty Ltd**

Designed by:

**Adventure Trading Australia Pty Ltd**

71 Charles Ulm Place,  
Eagle Farm, QLD 4009  
AUSTRALIA



Made in China